



MYB.TEXTILES

---

BRACKET SIZE

---

Single Blind:


Narrower than 2 metres and less than 2.5 metres in drop  
Supplied on a 32mm diameter barrel with a small single fitment  
Small single fitment available in White, Brown & Black  
This is the standard blind fitments

Large Single Blind:

200cm or wider and/or longer than 250cm  
Supplied on 40mm diameter barrel with a larger single fitment


---

32MM BRACKET

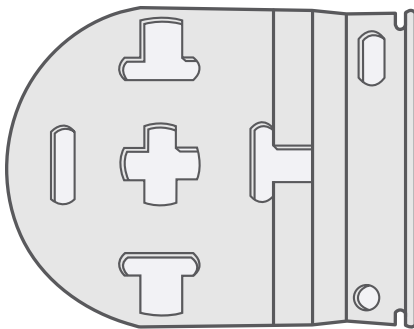


To fit 32mm Diameter Barrel  
Max width: 555mm

40MM BRACKET

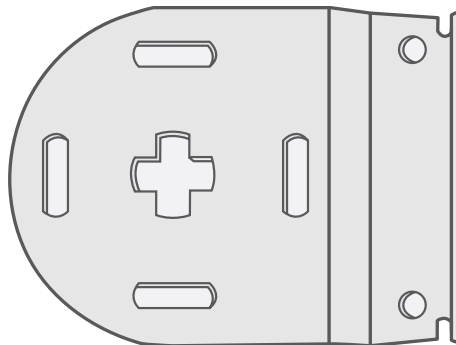

To fit 40mm Diameter Barrel  
Only available in White  
Max width: 680mm

40MM BRACKET  
with spacer

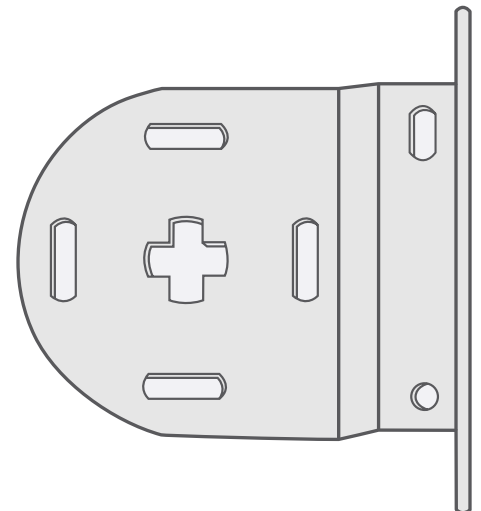

To fit 40mm Diameter Barrel

---

Please give exact measurements.  
We accept no responsibility for errors in ordering.




MYB.TEXTILES

---

## FITTING THE BRACKETS

---

- Bracket positions illustrated are for a blind with the control chain on the right.
- For a blind with the control on the left the bracket should be at the opposite ends.
- Brackets can be fixed to any flat surface above, behind or to the side of the blind.
  - They must be level to ensure the smooth operation of the blind.
  - Check that the rolled up fabric will not touch any surface.
  - Fix the brackets so that the outside of the brackets are this distance apart.

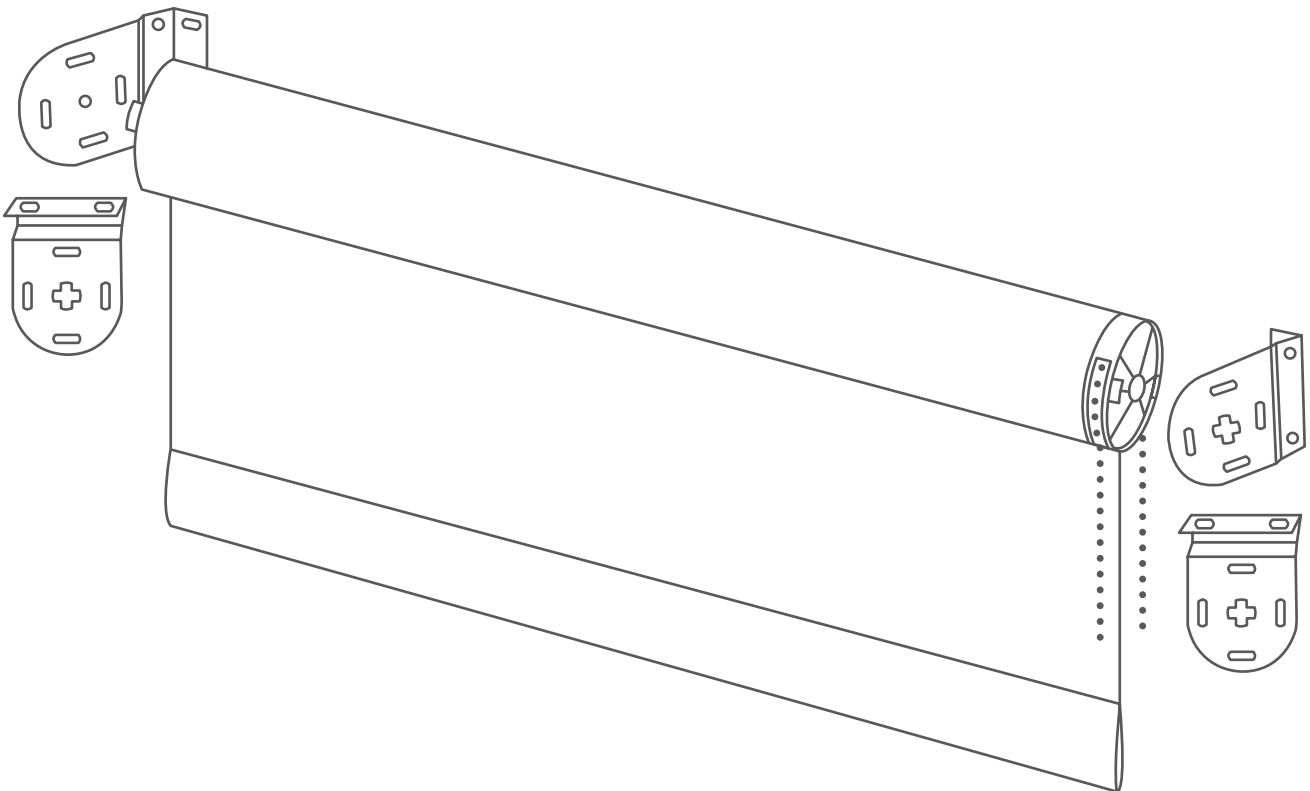

---

Please give exact measurements.  
We accept no responsibility for errors in ordering.




MYB.TEXTILES

---

## FITTING THE BLIND

---

- Hold the blind to the brackets with the fabric hanging from the back of the blind.
- Fit the spring plunger into the bracket.
- Push the blind into this bracket, depressing the plunger.
- With the locating hook pointing downwards place the hook in the vertical part of the 'I' Shape hole in the bracket.
- Allow the hook to drop downwards so that it locks into place in the bracket.

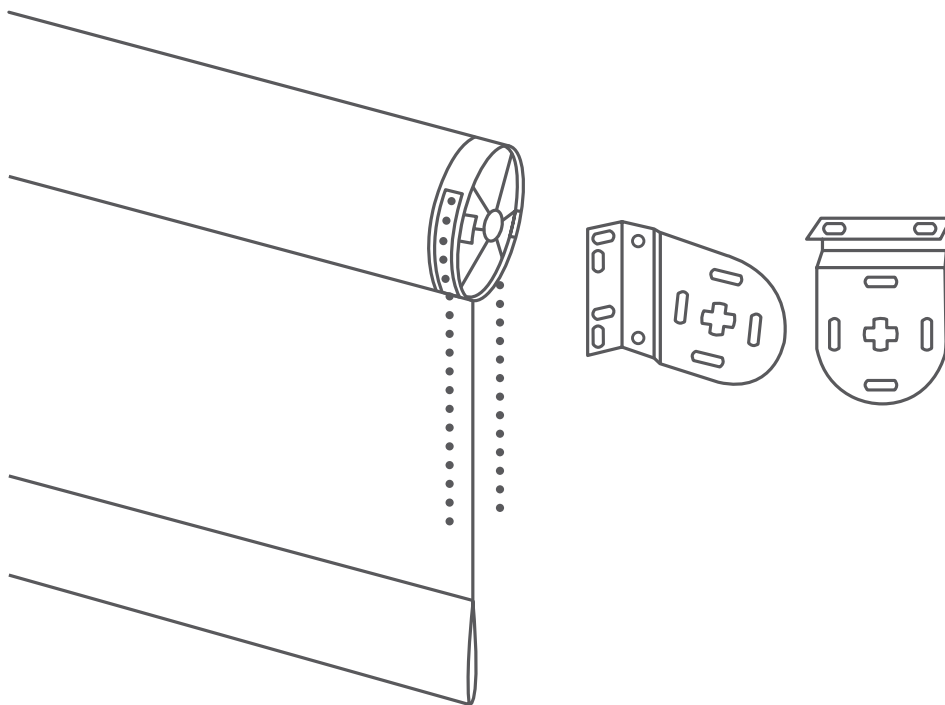

---

Please give exact measurements.  
We accept no responsibility for errors in ordering.